

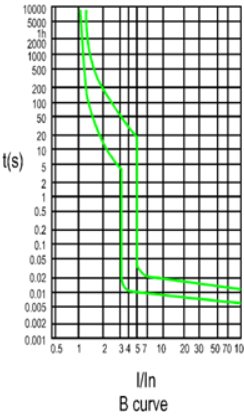

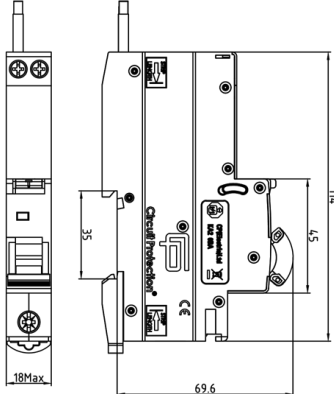







<h1>FuseBox®</h1>		BARCODE 																																			
		5 060523 520367																																			
RCBO RT061630B 		TECHNICAL																																			
<table border="1"> <thead> <tr> <th>Specification</th> <th>RCBO</th> </tr> </thead> <tbody> <tr> <td>Standard</td> <td>BS EN 61009-1</td> </tr> <tr> <td>Number of Poles</td> <td>1P + N</td> </tr> <tr> <td>Tripping Characteristics</td> <td>B curve= 3-5I_n C curve= 5-10I_n</td> </tr> <tr> <td>Tripping Type</td> <td>Electronic</td> </tr> <tr> <td>Rated Breaking Capacity (I_{cu})</td> <td>6kA</td> </tr> <tr> <td>Rated Current (I_n)</td> <td>6 - 50A</td> </tr> <tr> <td>Rated Voltage (U_n/AC)</td> <td>230V</td> </tr> <tr> <td>Residual Current Characteristics</td> <td>AC</td> </tr> <tr> <td>Rated Residual Operating Current (I_{Δn})</td> <td>0.03</td> </tr> <tr> <td>Frequency (Hz)</td> <td>50/60</td> </tr> <tr> <td>Mechanical Endurance</td> <td>20,000</td> </tr> <tr> <td>Protection Degree</td> <td>IP20</td> </tr> <tr> <td>Terminal Size (mm²)</td> <td>1 - 16 (L IN) 1 - 10 (Load: Nout Lout)</td> </tr> <tr> <td>Tightening Torque (Nm)</td> <td>2.5 (L IN) 1.2 (Load: Nout Lout)</td> </tr> <tr> <td>Operating Temperature °C</td> <td>-25~ +40°C</td> </tr> <tr> <td>Storage Temperature °C</td> <td>-25~ +70°C</td> </tr> </tbody> </table>		Specification	RCBO	Standard	BS EN 61009-1	Number of Poles	1P + N	Tripping Characteristics	B curve= 3-5I _n C curve= 5-10I _n	Tripping Type	Electronic	Rated Breaking Capacity (I _{cu})	6kA	Rated Current (I _n)	6 - 50A	Rated Voltage (U _n /AC)	230V	Residual Current Characteristics	AC	Rated Residual Operating Current (I _{Δn})	0.03	Frequency (Hz)	50/60	Mechanical Endurance	20,000	Protection Degree	IP20	Terminal Size (mm ²)	1 - 16 (L IN) 1 - 10 (Load: Nout Lout)	Tightening Torque (Nm)	2.5 (L IN) 1.2 (Load: Nout Lout)	Operating Temperature °C	-25~ +40°C	Storage Temperature °C	-25~ +70°C	TRIPPING CHARACTERISTICS 	
Specification	RCBO																																				
Standard	BS EN 61009-1																																				
Number of Poles	1P + N																																				
Tripping Characteristics	B curve= 3-5I _n C curve= 5-10I _n																																				
Tripping Type	Electronic																																				
Rated Breaking Capacity (I _{cu})	6kA																																				
Rated Current (I _n)	6 - 50A																																				
Rated Voltage (U _n /AC)	230V																																				
Residual Current Characteristics	AC																																				
Rated Residual Operating Current (I _{Δn})	0.03																																				
Frequency (Hz)	50/60																																				
Mechanical Endurance	20,000																																				
Protection Degree	IP20																																				
Terminal Size (mm ²)	1 - 16 (L IN) 1 - 10 (Load: Nout Lout)																																				
Tightening Torque (Nm)	2.5 (L IN) 1.2 (Load: Nout Lout)																																				
Operating Temperature °C	-25~ +40°C																																				
Storage Temperature °C	-25~ +70°C																																				
RCBO 		DIMENSIONS 																																			
PRODUCT DATA																																					
<table border="1"> <tbody> <tr> <td>PART NUMBER</td> <td>RT061630B</td> </tr> <tr> <td>BARCODE</td> <td>5060523520367</td> </tr> <tr> <td>DESCRIPTION</td> <td>16A 30mA B TYPE 6kA RCBO</td> </tr> <tr> <td>VOLTAGE</td> <td>230V 50/60Hz</td> </tr> <tr> <td>MAXIMUM LOAD</td> <td>16A</td> </tr> <tr> <td>TERMINAL CAPACITY</td> <td>1-16mm² L in, 1-10mm² Lout/Nout</td> </tr> <tr> <td>IP RATING</td> <td>20</td> </tr> <tr> <td>STANDARD</td> <td>BS EN 61009-1</td> </tr> <tr> <td>WEIGHT (1PC) Kg</td> <td>0.2</td> </tr> <tr> <td>INNER CARTON QUANTITY</td> <td>1</td> </tr> <tr> <td>OUTER CARTON QUANTITY</td> <td>60</td> </tr> <tr> <td>ORIGIN OF MANUFACTURE</td> <td>CHINA</td> </tr> </tbody> </table>		PART NUMBER	RT061630B	BARCODE	5060523520367	DESCRIPTION	16A 30mA B TYPE 6kA RCBO	VOLTAGE	230V 50/60Hz	MAXIMUM LOAD	16A	TERMINAL CAPACITY	1-16mm ² L in, 1-10mm ² Lout/Nout	IP RATING	20	STANDARD	BS EN 61009-1	WEIGHT (1PC) Kg	0.2	INNER CARTON QUANTITY	1	OUTER CARTON QUANTITY	60	ORIGIN OF MANUFACTURE	CHINA												
PART NUMBER	RT061630B																																				
BARCODE	5060523520367																																				
DESCRIPTION	16A 30mA B TYPE 6kA RCBO																																				
VOLTAGE	230V 50/60Hz																																				
MAXIMUM LOAD	16A																																				
TERMINAL CAPACITY	1-16mm ² L in, 1-10mm ² Lout/Nout																																				
IP RATING	20																																				
STANDARD	BS EN 61009-1																																				
WEIGHT (1PC) Kg	0.2																																				
INNER CARTON QUANTITY	1																																				
OUTER CARTON QUANTITY	60																																				
ORIGIN OF MANUFACTURE	CHINA																																				
		   																																			
<hr/> <p> CP (Electric) Ltd Unit 1, Block 8 Moorfield Industrial Estate Kilmarnock KA2 0BA t: 01563 533554 e: sales@cpelectric.co.uk www.cpelectric.co.uk </p>																																					
		Company Number 553729 VAT Number 258 7444 66																																			